


## 32 PORT INDUSTRIAL ETHERNET RACK SWITCH

The Sixnet EK32 is an industrial Ethernet switch offering 32 total Ethernet ports including up to 6 super fast Gigabit ports and up to 4 noise-immune fiber optic ports. Its rugged and compact 1U case fits into standard EIA, WECO and ETSI racks from 19" to 24".

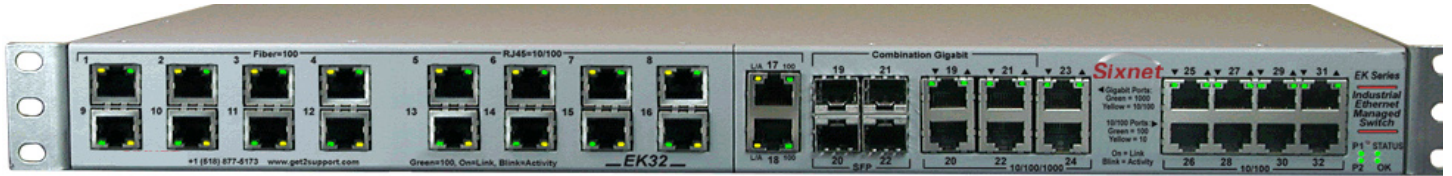

### PRODUCT HIGHLIGHTS

- 32 total Ethernet ports including
  - Up to 6 Gigabit ports including 4 combination ports
  - Up to 4 fiber optic ports for noise-immune links
- Designed to meet industrial standards

### REAL-TIME SECURE PERFORMANCE

- Real-Time-Ring™ or Rapid Spanning Tree (RSTP) for fast redundant ring or mesh networks
- SNMPv1 and v2 network management
- SNMPv3 authentication & encryption for security
- SNMP notifications (traps) for report on event
- Priority Queuing (QoS/CoS) for real-time operation
- IGMP for Multicast filtering (snooping & querying)
- VLAN for convenient traffic segregation
- Broadcast & multicast storm protection
- RMON & port mirroring for advanced diagnostics
- Security with HTTPS, SSL, SSH, SNMPv3 & more
- Easy configuration via Web, Telnet or CLI
- Free field-installable firmware upgrades forever

### RUGGED & RELIABLE HARDWARE

- Space efficient 1U rack-mount design
- Redundant AC and DC power options
- Relay output contact to signal alarms
- RS232 and USB console ports for local management
- Rugged corrosion-resistant aluminum enclosure
- Wide temperature -40 to +85 °C operation
- Sealed IP50 option protects against ingress

### ORDERING GUIDE

- **EK/EF32 PART NUMBER = Ea32bcddd-1**
  - a = Model Options
    - K = 26 fast Ethernet (FE) and 6 Gigabit (GE) ports
    - F = 32 fast Ethernet (FE) ports (no Gigabit)
  - b = Style Options
    - F = front style; Ethernet in front; power & console in back
  - c = Case / Cooling Options
    - S = sealed IP50 (no fans) (see derating)
    - T = fan cooled IP30 (no derating)
  - ddd = Power Options
    - D6N = dual inputs for +/-24/48/60 VDC (+/-18-75 VDC)
    - A0N = single input for VAC/VDC (90-264 VAC or 130-370 VDC)
    - AAN = dual VAC/VDC with redundant internal supplies

### PART NUMBER EXAMPLE:




**EK32FSD6N-1** with dual 24 VDC inputs and sealed IP50 (no fans!)

For accessories see next page.

**ETHERNET PERFORMANCE**

- 32 Ethernet ports with up to 6 Gigabit
- Managed, store & forward, wire-speed
- All IEEE 802.3 Ethernet protocols supported
- RJ45 port speed auto-negotiation
- RJ45 MDI/MDIX auto-crossover
- RJ45 TD and RD auto-polarity
- Typical latency (varies on load & settings)
  - @ 100 Mbps: 5 us + frame time
- Full or half duplex operation configurable per port
- MAC addresses supported 8192
- Memory bandwidth 32 Gbps
- Ethernet isolation 1500 VRMS 1 minute
- Console ports – USB and RS232 (RJ45)

**ETHERNET PORTS**

- Port Group 1
  - 16 ports of 10/100 RJ45
- Port Group 2
  - 2 bonus 10/100 RJ45 ports
- Port Group 3
  - EK model: 4 combination GE ports for copper or fiber links
  - EF model: 4 combination FE ports for copper or fiber links
- Port Group 4:
  - EK model: 2 Gigabit 10/100/1000 RJ45 ports
  - EF model: 2 fast Ethernet 10/100 RJ45 ports
- Port Group 5
  - 8 fast Ethernet 10/100 RJ45

**ETHERNET COMPLIANCE**

- IEEE 802.3z (Gigabit 1000 Mbps Ethernet connections)
- IEEE 802.3u (Fast Ethernet 100Mbps for newer devices)
- IEEE 802.3 (10Mbps Ethernet supports legacy devices)
- IEEE 802.3x (Full-Duplex with Flow Control)
- IEEE 802.1D/w (Rapid Spanning Tree for redundant rings and Spanning Tree for interoperability)
- IEEE 802.1p (Priority Queuing – QoS, CoS, ToS/DS)
- IEEE 802.1Q (VLAN for traffic segregation)
- And more

**REAL-TIME-RING™**

- Link loss recovery: 30 mS plus 5 mS per hop
- Switches in a ring: <50 for best performance
- Multiple rings supported

**“OK” ALARM OUTPUT**

- Indicates power & operational status
- Max. ratings
  - 250 VAC or 220 VDC
  - 2 A @ 30 VDC or 0.25 A @ 250 VAC
- Minimum load 10 mVDC, 10 µA

**POWER INPUT**

- Input voltage standard options
  - 18-36 VDC (24 VDC nominal)
  - 36-75 VDC (+/-48 VDC nominal)
  - 90-264 VAC (110/220 VAC nominal)
  - 130-370 VDC (250 VDC nominal)
- Power options
  - Dual inputs or redundant supplies
- Input power consumption 35 W maximum

**ENVIRONMENTAL**

- Operating temperature range:
  - T option (fan cooled): -40 to +85 °C (no derating) (cold startup at -40 °C)
  - S option (sealed IP50): -40 to +85 °C w/all ports linked at 10/100 or derate
    - to +75 °C with 2 Gigabit links
    - to +70 °C with 4 Gigabit links
    - to +65 °C with 6 Gigabit links
- Storage temperature range -40 to +85 °C
- Humidity (non-condensing) 5 to 95% RH (optional conformal coating is available)

**STANDARDS COMPLIANCE (PENDING)**

- Electrical safety – EN61010-1, CE
- EMC – FCC part 15, ICES-003; EN61000-6-4, -2, CE
- RoHS and WEEE compliant
- ISO9001:2000 certified company

**PHYSICAL**

- Mounting – 19” to 24” racks, EIA/WECO/ETSI supported
- Case – corrosion-resistant heavy-gauge aluminum
- Egress protection IP50 with S option or IP30 with T option
- Weight (typical) 5.5 lbs (2.5 kg) – varies slightly by model
- Dimensions – 1.75 x 17.3 x 12” (44.5 x 439.4 x 305.0 mm)

**ACCESSORIES**

- |                        |                                                |
|------------------------|------------------------------------------------|
| <b>EK1-BRCKT-19</b>    | Set (2) of 1U 19” brackets (one set included)  |
| <b>EK1-BRCKT-23</b>    | Set (2) of 1U 23” EIA/WECO                     |
| <b>EK1-BRCKT-2324</b>  | Set (2) of 1U 23/24” EIA/WECO                  |
| <b>EK1-BRCKT-ETSI</b>  | Set (2) of 1U 536 mm ETSI brackets             |
| <b>EK1-BRCKT-WALL</b>  | Set (2) of wall brackets                       |
| <b>RJ45-PLUG-16</b>    | Dust plugs for unused RJ45 port (16 pieces)    |
| <b>EK-CCOAT-1</b>      | Conformal coating – contact Sixnet for details |
| <b>GMFIBER-SFP-500</b> | Gigabit SFP fiber transceiver, mm, 550 m       |
| <b>GMFIBER-SFP-2K</b>  | Gigabit SFP fiber transceiver, mm, 2 km        |
| <b>GSFIBER-SFP-10K</b> | Gigabit SFP fiber transceiver, sm, 10 km       |
| <b>GSFIBER-SFP-30K</b> | Gigabit SFP fiber transceiver, sm, 30 km       |
| <b>GSFIBER-SFP-50K</b> | Gigabit SFP fiber transceiver, sm, 50 km       |
| <b>GSFIBER-SFP-80K</b> | Gigabit SFP fiber transceiver, sm, 80 km       |
| <b>FMFIBER-SFP-4K</b>  | 100Mb SFP fiber transceiver, mm, 4 km          |
| <b>FSFIBER-SFP-30K</b> | 100Mb SFP fiber transceiver, sm, 30 km         |
| <b>FSFIBER-SFP-60K</b> | 100Mb SFP fiber transceiver, sm, 60 km         |
| <b>FSFIBER-SFP-100</b> | 100Mb SFP fiber transceiver, sm, 100 km        |
- (Contact Sixnet for other fiber distances or special application fiber optic transceivers.)

All specifications are subject to change. Consult factory for latest info.



Sixnet Technology Park  
331 Ushers Road • Ballston Lake, NY 12019 • USA  
518.877.5173 • Fax 518.877.8346 • sales@sixnet.com

Datasheet EK32/EF32  
Rev2: 02-Feb-2010